

# VMC-32LCD-PWCP1

Home | Security | Monitors | Public View Monitors

VMC-32LCD-PWCP1  
32" (81.3cm) Public View Monitor, Network,  
1366x768 Pixels, 230VAC

**Art-Nr. 90549**



## Main Features

Professional monitor with built-in camera  
32" display screen size, 16:9(4:3) image display  
Switchable PAL/NTSC selection  
Full and multi screen display / PIP & PBP display  
Multiple language on-screen menu driven setup  
Text generation & advertisement sending via Network

CVBS, S-Video, audio and Network input  
PC analog and DVI input, USB 2.0 host  
Integrated 1/3" colour camera with 4-9mm lens  
Integrated memory function via 40GB hard disk  
Supply voltage: 100 to 240VAC, 50/60Hz  
Rugged metal cabinet / Integrated loudspeakers

## Specifications

Series	Combo System
Video standard	PAL/NTSC
Display element	Colour TFT/LCD
Screen size	32"
Screen Size (cm)	81.3 cm
Active display area (H/V)	697.7x392.2mm
Pixel format	1366 (H) x 768 (V), RGB vertical stripes 0.51x0.51mm
Pixel fault class	ISO 13406-2, Class II
Screen formats	16:9, 4:3
Scanning method	Digital progressive scan (Frame/Motion mode)
Resolution pixels	1366x768
Colour scales	16.7Mio (8 Bit)
Contrast ratio typical	1200:1

# VMC-32LCD-PWCP1

(Continuation Specifications)

Brightness typical	500 cd/m <sup>2</sup>
Viewing angle right	176°
Viewing angle bottom	176°
Light source	16CCFL
Response time typical	8 ms
PC interfaces	DVI-D, VGA, Analog RGB (0.714Vp-p, 75ohms), H & V sync. (TTL), 15-pin D-Sub
Video inputs (type)	Y/C, DVI-D, VGA, component (YPbPr), composite (CVBS)
Component video input	1Vp-p, 75ohms. 3x Cinch (1080i, 720p, 480p, 480i)
Video inputs (amount)	internal and external camera (VCR)
Video outputs	internal camera
Main video outputs	-
Spot monitor	-
Audio inputs	2
Audio output power	2x 5W
Menu languages	English
System	colour
Video outputs	composite (CVBS)
Operation mode	Simplex
Intergrated writer	no
Harddisk capacity (internal)	40 GB
Max. harddisk capacity (internal)	40 GB
Interfaces external storage	USB
Serial interfaces	no
Compression standard	JPEG, MPEG-1/2, MPEG-4.2 ASP
Display options	Full, PIP, PBP Monitoring
Control units (external)	remote control
Supply voltage	100~240VAC
Power consumption	200W
Temperature range (operation)	+5°C ~+40°C
Housing material	metal
Mount	VESA standard (4 threads M4, 100x100mm)
Colour (housing)	silver grey
Dimensions (HxWxD)	see drawing
Weight	22.5kg
Parts supplied	Power supply unit with power cord, VGA, USB and DVI cable, IR remote control unit, Client S/W, Manual
Certificates	CE
Options	Wall and ceiling brackets

## Optional accessories


## VMC-32LCD-PWCP1

90448	VMC-LCD/WMB-3	Wall Mount Bracket, Pan and Tilttable for LCD Monitors
90485	VMC-LCD/CMB-2	Ceiling Mount Bracket, Pan and Tilttable for LCD Monitors from 23"

# VMC-32LCD-PWCP1

Home | Security | Monitors | Public View Monitors

## Technical drawing

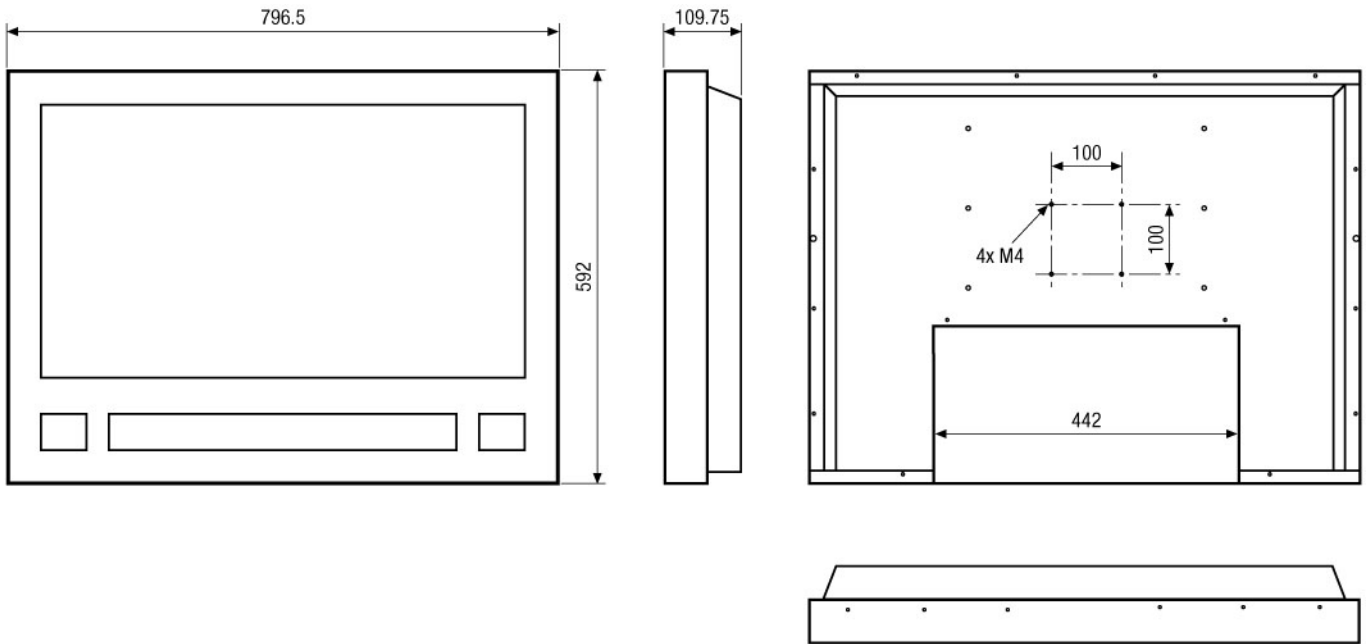

Maße/Dimensions: mm

GENITECH

108, rue Henri Barbusse - 95100 Argenteuil - FR  
Phone - 01.49.63.74.41 - Telefax - 01.49.63.74.51  
ecorbeau@genitech.fr - www.genitech.fr