

VMC-32LCD-PW2

Home | Security | Monitors | TFT/LCD

VMC-32LCD-PW2
32" (81.3cm) Public View Monitor, 16:9, 4x BNC,
Y/C, VGA, 2x Audio, 24VDC

Art-Nr. 90568



Main Features

TFT LCD colour MUX monitor
High brightness & contrast
Resolution of 1366x768 px.
Full screen and high resolution quad display
Main & sub window display
Video loss & Motion detection alarm

Image capture & Replay function
Screen freeze capability
VCR and alarm input & output
Integrated loudspeakers
User friendly programmable on-screen menu
Key lock / Menu password function

Specifications

Series	Combo System
Video standard	PAL/NTSC
Display element	Colour TFT/LCD
Screen size	32"
Screen Size (cm)	81.3 cm
Active display area (H/V)	697.7x392.2mm
Pixel format	1366 (H) x 768 (V), RGB vertical stripes 0.51x0.51mm
Pixel fault class	ISO 13406-2, Class II
Screen formats	16:9, 4:3
Scanning method	Digital progressive scan (Frame/Motion mode)
Resolution pixels	1366x768
Colour scales	16.7Mio (8bit)
Contrast ratio typical	4000:1

VMC-32LCD-PW2

(Continuation Specifications)

Brightness typical	450 cd/m ²
Viewing angle vertical	178°
Viewing angle horizontal	178°
Light source	4UCCFL
Response time typical	8 ms
PC interfaces	VGA, Analog RGB (0.714Vp-p, 75ohms), H & V sync. (TTL), 15-pin D-Sub
Video inputs (type)	composite (CVBS), Y/C, VGA, component (YPbPr)
Video inputs	4x CVBS: 1Vp-p, 75ohms, BNC Y/C: Y= 0.7Vp-p, C= 0.3Vp-p, 75ohms, 4-pin MiniDIN. Loop-through inputs, automatic 75ohms termination
Component video input	1Vp-p, 75ohms. 3x Cinch (1080i, 720p, 480p, 480i)
Video inputs (amount)	4
Video outputs	3x 1Vp-p, CVBS, 75ohms, BNC (Monitor, Record, Spot)
Audio inputs	2
Audio output power	2x 5W
Alarm output	1x NO/NC contact
Menu languages	German, English, French, Spanish, Italian, Polish, Russian
Intergrated writer	no
Interfaces external storage	-
Serial interfaces	no
Compression standard	-
Multiplexer	Built-in 4-ch. real time multiplexer
Digital zoom	2x
Recording	Up to 60 still images
External adjustments	On-screen control, Input selection, Multiplexer control, Digital Zoom, Recording and playback, Alarm reset, ON/OFF
Control units (external)	remote control
Remote access	no
Remote control	Wireless remote control enabled
Password protection	key lock and menu password enabled
Power consumption	164W
Temperature range (operation)	0°C ~+40°C
Housing material	metal
Mount	VESA standard (4 threads M4, 100x100mm)
Colour (housing)	silver grey
Dimensions (HxWxD)	see drawing
Weight	18.5kg
Parts supplied	PSU 100~240V with power cord, Driver CD, VGA cable, IR remote control unit, Multiple language manual
Certificates	CE
Options	Wall mount bracket / Table stand

VMC-32LCD-PW2


Optional accessories

90448	VMC-LCD/WMB-3	Wall Mount Bracket, Pan and Tilttable for LCD Monitors
90485	VMC-LCD/CMB-2	Ceiling Mount Bracket, Pan and Tilttable for LCD Monitors from 23"

VMC-32LCD-PW2

Home | Security | Monitors | TFT/LCD

Technical drawing

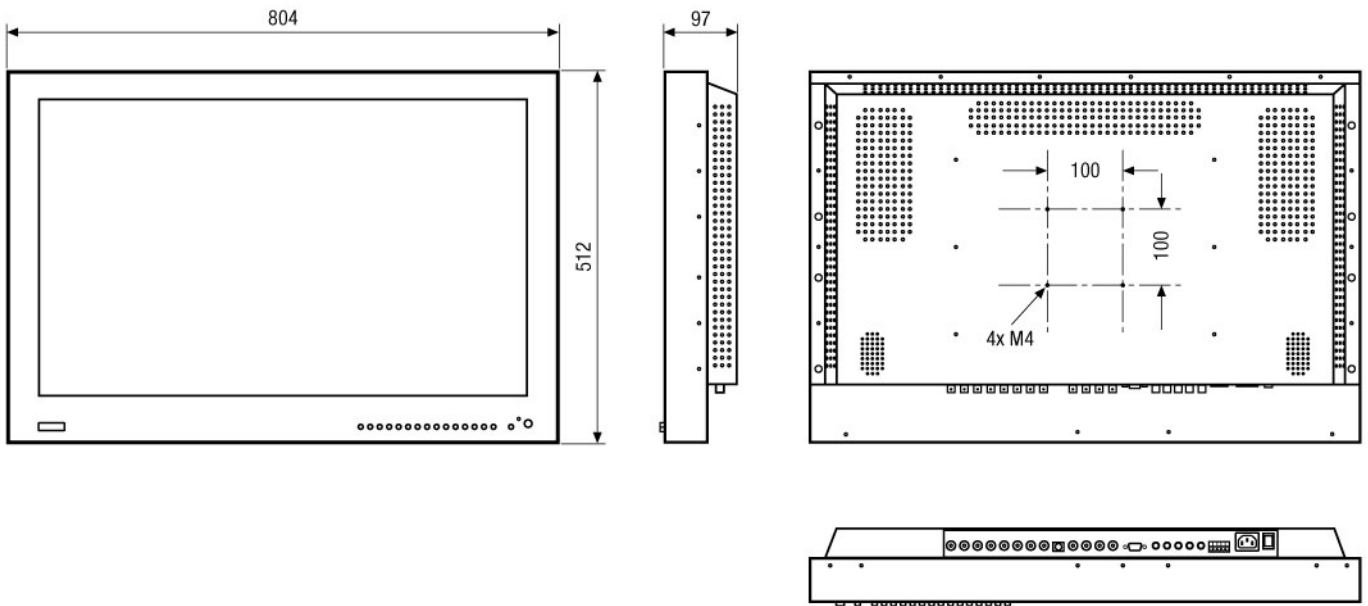

Maße/Dimensions: mm

GENITECH

108, rue Henri Barbusse - 95100 Argenteuil - FR
Phone - 01.49.63.74.41 - Telefax - 01.49.63.74.51
ecorbeau@genitech.fr - www.genitech.fr