

# FLD-1101

Home | Security | IP Domes | Standard Fixed

FLD-1101

1/4" Network Dome, Fixed, Day&Night, 4mm ,

640x480, vandal resistant, PoE, ONVIF

Art-Nr. 92716



ONVIF



## Main Features

1/4" VGA CMOS network mini dome

Resolution 640x480 max. (VGA)

Simultaneous video streaming (H.264/MJPEG/MPEG-4)

Electronic day&night switching

e-PTZ support

Privacy zone masking

Integrated motion detection

Protection rating IP66 / vandal resistant

Alarm-recording (NAS, ISCSI)

ONVIF conformity

Power over Ethernet (PoE)

Client management software included

## Specifications

Series	eneo F
System	day&night
Sensor size	1/4"
Imager	CMOS
Sensitivity (at 50% video signal)	0,4 Lux, at F1.2
Horizontal resolution	n/a TVL
Digital Noise Reduction (DNR)	no
Low speed shutter	yes, 1/25sec. ~1/100,000sec.
Backlight compensation	no
Wide Dynamic Range (WDR)	no
IR cut filter	OLPF (Overlay Low Pass Filter)
Resolution max.	640x480
Resolution	640x480 (4:3), 352x288 (4:3)

# FLD-1101

(Continuation Specifications)

<b>Image transmission rate max.</b>	30 B./Sek.
<b>Privacy zones masking</b>	4 areas selectable
<b>Activity detection</b>	yes
<b>Analysis functions</b>	motion detection
<b>Text display</b>	supplied
<b>Menu languages</b>	English, Chinese
<b>Video outputs</b>	-
<b>Monitor outputs</b>	-
<b>Audio support</b>	no
<b>Alarm inputs</b>	yes
<b>Alarm outputs</b>	yes
<b>Internal storage</b>	no
<b>Compression standard</b>	H.264, MJPEG
<b>Stream types</b>	H.264, MJPEG multiple
<b>Ethernet interface</b>	100Base-TX
<b>Web browser</b>	MS Internet Explorer vers. 7.0 or higher
<b>Network protocols</b>	TCP/IP, HTTP, HTTPS, DHCP, DNS, FTP, DDNS, RTP, RTCP, PPPoE, SMTP, NTP, SNMP, SIP, IPv4, IPv6
<b>Multicast compliant</b>	yes
<b>Lens type</b>	fixed focal length
<b>Focal length</b>	4 mm
<b>Horizontal angle of view</b>	54,9°
<b>Digital zoom</b>	yes
<b>Illumination</b>	no
<b>Recording</b>	permanent, timer, movement, manual
<b>Serial interfaces</b>	no
<b>Remote configuration</b>	via web browser, remote software
<b>Password protection</b>	yes
<b>e-PTZ support</b>	yes
<b>Supply voltage</b>	12VDC, PoE
<b>Power over Ethernet</b>	yes
<b>Heater</b>	no
<b>Power consumption</b>	3W
<b>Mounting</b>	wall mount, ceiling mount
<b>Temperature range (operation)</b>	-10°C ~+60°C
<b>Vandalism resistant</b>	yes
<b>Housing</b>	outdoor, indoor
<b>Housing material</b>	metal
<b>Colour (housing)</b>	RAL9010
<b>Colour (bubble)</b>	clear

# FLD-1101


(Continuation Specifications)

<b>Protection rating</b>	IP66
<b>Management Software Support</b>	Finitra, Zelaris
<b>SDK</b>	available, SDK incl. HTTP-API and ActiveX
<b>ONVIF</b>	ONVIF Test Tool version 1.02.2.10
<b>Certificates</b>	IK10, EN 50102, IEC 60068-2-75 Eh, 50, CE
<b>Dimensions (HxWxD)</b>	100x97.5x46.5mm100×97.5×46.5mm
<b>Weight</b>	250 g
<b>Parts supplied</b>	Quick Installation Guide, Manual and Software on CD-ROM, installation CD, Torx key, drilling template, PSU

## Optional accessories

200803	ZELARIS ELEMENTS	Video Management Software, for eneo IP Cameras
--------	------------------	--

## Technical drawing

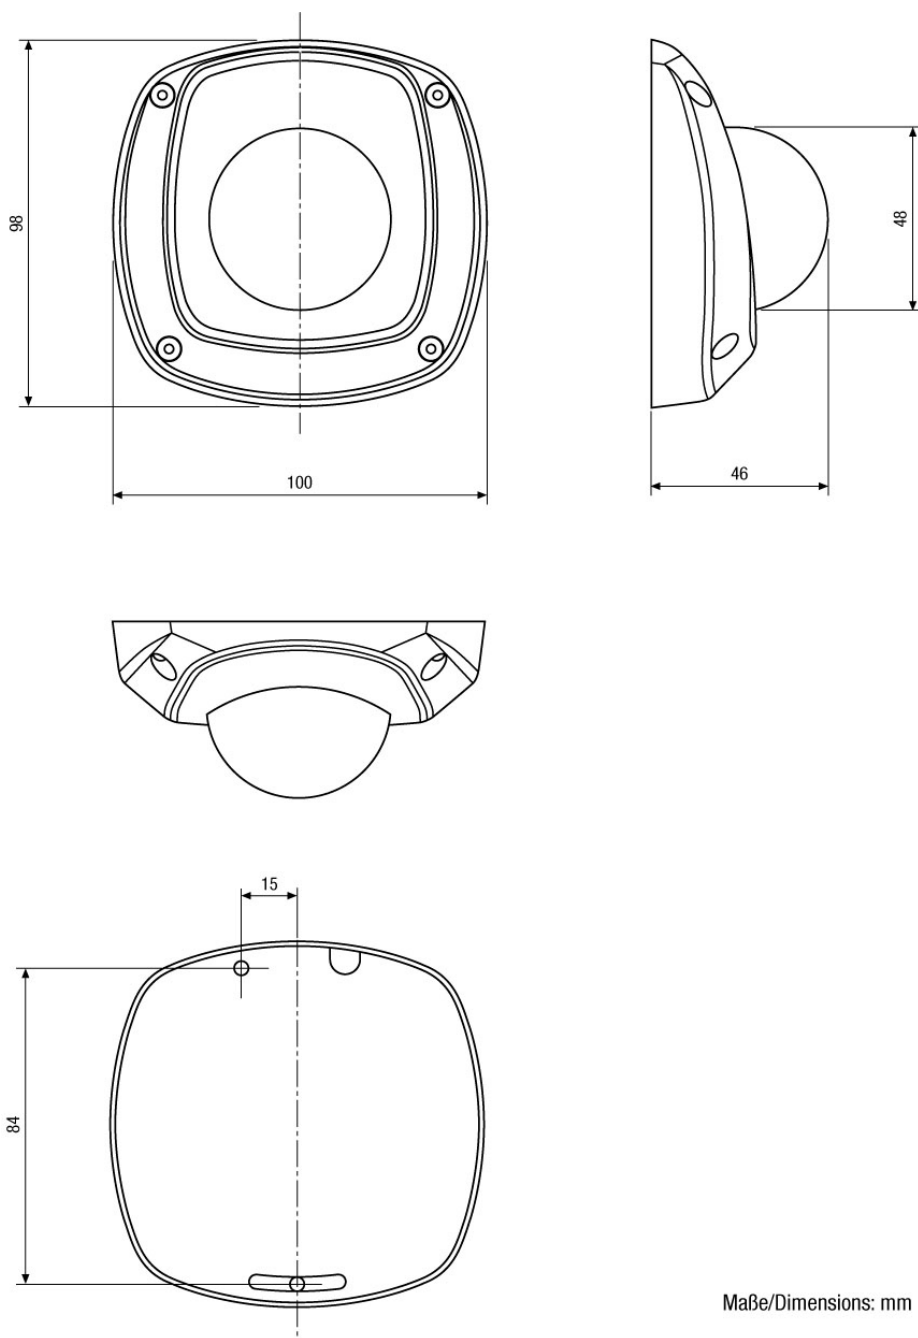

GENITECH Comptabilité

36 Rte de Montpellier · 34230 Vendémian · FR  
Phone - 01.49.63.74.41 · Telefax - 01.49.63.74.51  
genitech@genitech.fr · — www.genitech.fr

**GENITECH**