

Caméra cylindrique HD

Diamètre 23mm

GTC-232MWX



- 1/3.8" Progressice Scan CMOS
- 1090p60(50)
- EX-SDI, HD-SDI output
- Fixed lens 3.6mm
- WDR, 3DNR
- Digital D&N
- Mini Bullet Camera


Specifications

Image Device	1/2.8" Progressive Scan SONY CMOS
Video output mode	HD-SDI / EX-SDI 1.0 : 1080p@60(50), 1080p@30(25), 720p@60(50), 720p@30(25), 1080i@60(50) CVBS Out: NTSC / PAL (This is not available in the RS-485 type)
Effective Pixels	1945 (H) x 1097 (V)
Unit cell size	2.9um (H) x 2.9um (V)
S/N Ratio	More than 50dB
Minimum Illumination	1.5Lux(30FPS), 3Lux(60FPS) @ F2.0
Lens	Board Lens, Pinhole Lens
Shutter speed	Auto / Manual selectable
BLC / HLC	OFF / BLC / HLC
3DNR	OFF / LOW / MIDDLE / HIGH
AGC	LOW / MIDDLE / HIGH
White Balance	AUTO / PUSH LOCK / MANUAL
Digital Zoom Ratio	x1 ~ x16
Digital Slow Shutter	OFF, x2 ~ x64
Privacy Masking	Zone 16 ea , On / Off
OSD	Remote Control / RS-485 Remote Control (RS-485)
Operating Temperature	14°F~112°F (-10°C~+50°C)
Storage Temperature	-4°F~158°F (-20°C~+70°C)
Power Consumption	DC12V (±10%), Max. 180mA
Dimensions (mm)	23.0(Ø) x 75.85(WaterProof Cap Housing only)
Weight	Approx. 90g
IP Rating	IP67 (WaterProof Cap Housing only)

Applications :

- UAV, ROV
- Nucléaire
- Aéronautique
- Robotique
- Défense
- Police

Dimensions

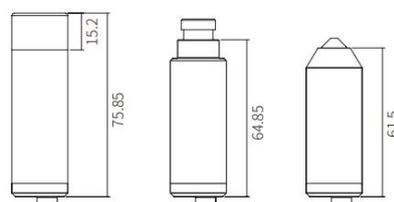

GENITECH Video professionnelle 108 rue H. Barbusse 95100 Argenteuil Tél. 06.37.81.38.31