


# Carte Interface 3G HD-SDI

pour Sony FCB-EV


compatible avec FCB-EH, et FCB SE600

# GTTV 8033

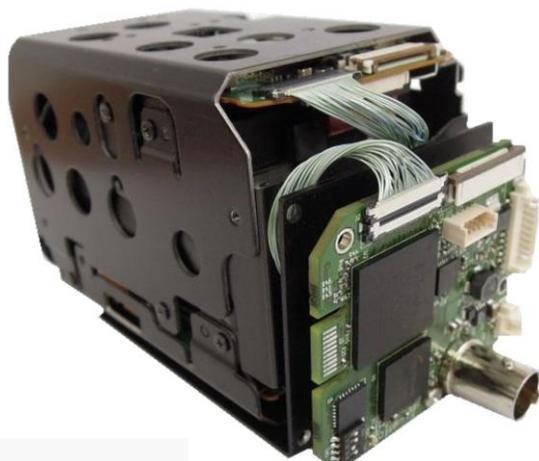

**Full HD**  
1920 x 1080

- Sortie numérique 3G HD-SDI SMPTE-424M
- Formats supportés : voir tableau ci dessous
- Sortie analogique HD : Component (Y, Pb, Pr)
- Sortie analogique SD : VBS
- Faible niveau de jitter
- Pilotage RS232 & VISCA niveau TTL
- Protection électronique des entrées caméras
- Alimentation 5V à 12V / 6W (5V pour FCB-SE600)
- Générateur de réticule, générateur de mire
- Température de stockage: -20°C / 60°C
- Température de fonctionnement : 0°C / 60°C
- Livrée avec câble et kit de fixation
- Dimensions : 48(H) x 45(L) x 20(P)

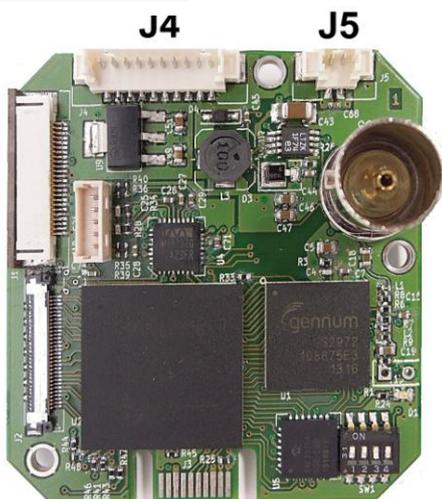

J4	
Pin 1	Y
Pin 2	GND
Pin 3	Pb
Pin 4	GND
Pin 5	Pr
Pin 6	GND
Pin 7	RX RS232
Pin 8	TX RS232
Pin 9	GND
Pin 10	VBS

J5	
Pin 1	6-12v DC
Pin 2	GND

SW 1	SW 2	SW 3	SW 4	FCB-EH-SE	FCB-EV
OFF	OFF	OFF	OFF	External	External
ON	ON	ON	ON	-	1080p60
OFF	ON	ON	ON	-	1080p30
OFF	OFF	ON	ON	-	720p60
OFF	OFF	ON	ON	-	1080p59.94
ON	ON	OFF	OFF	-	1080p50
ON	OFF	OFF	OFF	1080p29.97	1080p29.97
OFF	ON	OFF	OFF	1080p25	1080p25
ON	ON	OFF	OFF	1080i59.94	1080i59.94
OFF	OFF	ON	OFF	1080i50	1080i50
ON	OFF	ON	OFF	720p59.97	720p59.97
OFF	ON	ON	OFF	720p50	720p50
ON	ON	ON	OFF	720p29.97	720p29.97
OFF	OFF	OFF	ON	720p25	720p25
ON	OFF	OFF	ON	PAL	PAL
OFF	ON	OFF	ON	NTSC	NTSC



### Applications :

- Broadcast
- UAV, ROV
- Médical
- Aéronautique
- Robotique
- Défense
- Police

### Options connectique



BNC

SMB

MCX

### Accessoires Fournis

- Nappe 24 pts
- Micro coax 30 pts
- Connecteurs J4,J5 câblés (20cm)
- Interface de fixation mécanique
- Vis et entretoises
- Notice technique