

HDD-2110M1080

Home | Security | HDcctv / HD-SDI | Fix Domes

HDD-2110M1080
1/3"HD-SDI Dome, Fixed, Day&Night, 1920x1080,

WDR, 3.0mm, 12VDC

Art-Nr. 200840



Main Features

1/3"2.0 megapixels progressive scan CMOS sensor	Digital zoom (2x - 32x)
Resolution max. 1920 x 1080 (HD 1080p)	Privacy zones
1.5G HD-SDI video transmission via coax cable	Flat and compact design
WDR (wide dynamic range)	Wall or ceiling mount
Integral motion detection	Vandal-resistant, IP67
Integral object detection	

Specifications

Series	eneo HDcctv
System	day&night
Sensor size	1/3"
Imager	CMOS, Panasonic Progressive Scan CMOS imager
Active picture elements	1944(H) x 1092(V)
Resolution	1920x1080 (16:9), 1280x720 (16:9)
Frame rate	1080 @ 25/30p, 720 @ 50/60p
Synchronization	internal
Signal-to-noise ratio	-50 db
Sensitivity	1 Lux, 0.5Lux(b&w), 50 IRE
Automatic gain control (AGC)	ON/OFF switchable
Exposure modes	automatic, manual
Automatic electronic shutter (ESC)	1/25~1/60000sec.

HDD-2110M1080

(Continuation Specifications)

Low speed shutter	yes, 2x ~4x
Digital Noise Reduction (DNR)	yes, 2D NR, 3D NR
Backlight compensation	BLC, ON/OFF switchable
Wide Dynamic Range (WDR)	yes, ON/OFF switchable
White balance	automatic, manual, indoor, outdoor, Preset
Blemish compensation	pixel compensation ON/OFF selectable
IR cut filter	standard
Day/Night switching	auto, day, night, By external contact closure
Privacy zones masking	32 zones masking
Menu languages	English
OSD function control	AGC, day&night, white pixel correction, WDR/BLC, digital zoom, white balance, DNR, privacy zones, motion detection, shutter control, freeze, H/V flip (mirror picture), Rotation
Text display	title and camera ID
Activity detection	yes
Motion detector	3 zones, ON/OFF switchable, vertical, horizontal & vertical
Digital zoom	2x ~32x
Lens type	fixed focal length
Focal length	3 mm
Horizontal angle of view	77,4°
Aperture range (F)	F1.8
Video outputs	HD-SDI (BNC) SMPTE 292M standard, FBAS control out
Alarm inputs	no
Alarm outputs	1
e-PTZ support	yes
Illumination	no
External connections	12VDC power input, RS-485, HD-SDI BNC output, video (BNC)
Serial interfaces	RS-485
Serial interfaces protocols	Pelco D, Pelco P
Housing	outdoor
Housing material	aluminium
Colour (bubble)	clear
Colour (housing)	Pantone Warm Gray 1C
Blower	no
Mounting	wall mount, ceiling mount
Supply voltage	12VDC, (+/-10%)
Power consumption	2.5W
Temperature range (operation)	-10°C ~+50°C
Protection rating	IP66
Vandalism resistant	yes

HDD-2110M1080

(Continuation Specifications)

Dimensions (HxWxD)	49x139x140
Weight	410 g
Parts supplied	screw set, manual
Certificates	CE


Optional accessories

203658	VT-PS12DC-11	Plug-in Power Supply Unit, 100-240VAC/12VDC (1.0A), Regulated, with DC Plug
200836	HDA-1002EC	Extender/Converter 1 x HD-SDI Input, 1 x HD-SDI Output, 1 x HDMI Output
200817	HDA-1004D	Distributor HD-SDI, 1 x HD-SDI Input, 4 x HD-SDI Outputs
200818	HDA-1001E	Repeater HD-SDI, 1 x HD-SDI Input, 1 x HD-SDI Output

HDD-2110M1080

Home | Security | HDcctv / HD-SDI | Fix Domes

Technical drawing

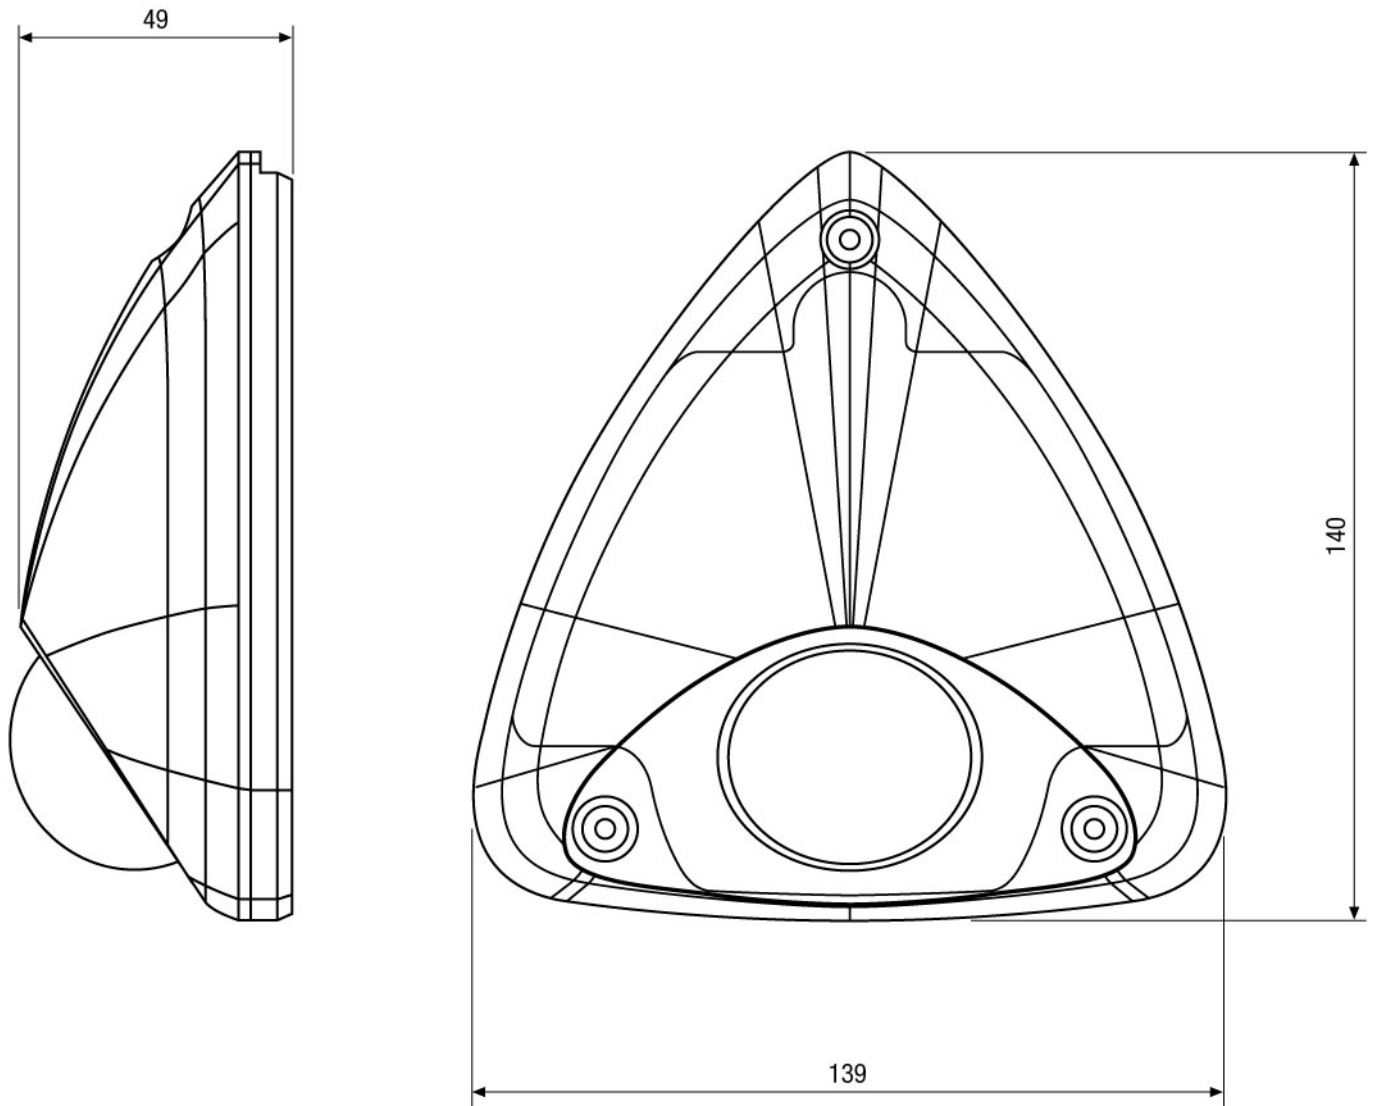

Maße/Dimensions: mm

GENITECH Comptabilité

36 Rte de Montpellier · 34230 Vendémian · FR
Phone - 01.49.63.74.41 · Telefax - 01.49.63.74.51
genitech@genitech.fr · www.genitech.fr

GENITECH