

IK-HD1

3CCD HDTV CAMERA



Features

- 1080i output
- 1920 x 1080 output pixels
- 3CCD (1/3") interlace
- C-mount
- Digital HD-SDI (SMPTE 292M);
Analog RGB or Y/P_b/P_r
- RS 232C serial interface
- Auto & manual white balance
- Optional accessories:
3, 6, 10 & 30 meter cables;
4mm or 15 mm lens

Applications

- Scientific imaging / diagnostics
- Specialty broadcast
- Homeland security
- Industrial video / inspection



True High-Definition from the World's Smallest Camera Head.

Toshiba's HD 3CCD Color Camera System gives you the sharpest, clearest, true color imagery available – from the most compact HD camera on the market. Our unique prism block technology delivers impeccably sharp detail from a 1.6" camera head. Let Toshiba bring your project to HD life.

TOSHIBA
Leading Innovation >>>

IK-HD1 3CCD HD CAMERA


CAMERA HEAD:

SPECIFICATIONS


Image Sensor	3CCD – 1/3 inch interlace
Output Resolution	1920 (H) x 1080 (V)
Sensitivity	F6.8 standard (2000 lux)
Minimum Illumination	13 lux (F2.2, Sensitivity + 18 dB)
S/N Ratio	≥ 54 dB
Lens Mount	C-mount
Ambient Temperature	0°C to 40°C (32°F to 104°F)
Ambient Humidity	Less than 90%
Dimensions	32.6 mm (W) x 38.6 mm (H) x 41 mm (D)
Weight	65 grams (2.3 oz)

Design and specifications are subject to change without notice.

EXTERIOR DIMENSIONS

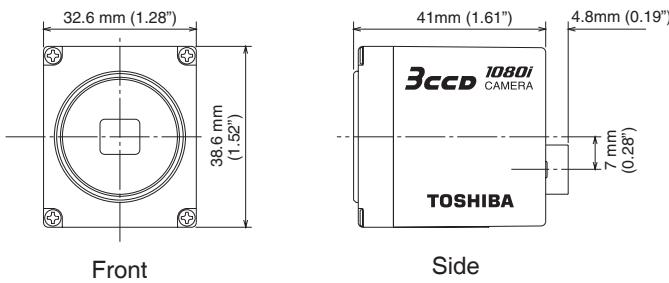

CONNECTION

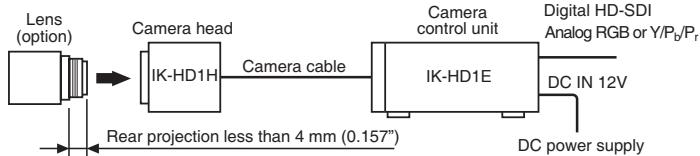

SYSTEM COMPONENTS

For further details, contact your Toshiba Europe distributor.

Camera System

Model	Description
IK-HD1H	Camera Head
IK-HD1E	Camera Control Unit

Camera Cable


Model	Length
EXC-HD03	3 m
EXC-HD06	6 m
EXC-HD10	10 m
EXC-HD30	30 m

CONTROLLER:

SPECIFICATIONS

Power Requirements	12V DC ± 10%
Power Consumption	10.3W
Output Signal	Digital HD-SDI (SMPTE 292M); Analog RGB or Y/P _b /P _r
Frame Rate	30 frames per second
Scene File (user memories)	5 files (A, B, C, D, E)
White Balance	ATW (automatic tracing balance), AWB (automatic white balance), MANUAL
Gain	AUTO (automatic gain control), MANUAL, OFF (0 dB)
Ambient Temperature	0°C to 40°C (32°F to 104°F)
Ambient Humidity	Less than 90%
Dimensions	110 mm (W) x 40 mm (H) x 186 mm (D)
Weight	730 grams (1.61 lbs)

FRONT AND BACK PANELS

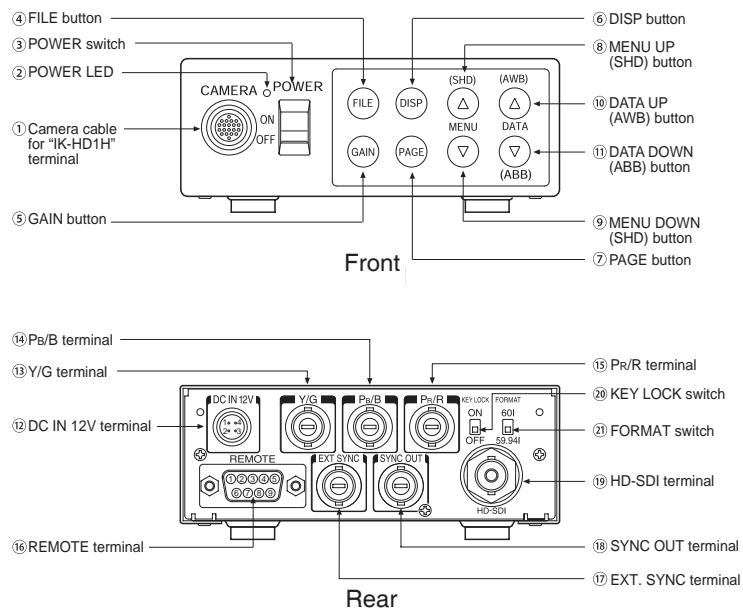

TOSHIBA
Leading Innovation >>>

Toshiba Europe GmbH
Industrial Camera Systems
Chriesbaumstrasse 4, CH-8604 Volketswil
+41 (0)44 908 56 30 • www.toshiba.ch/ics