

MC-S128B

High Sensitivity 12x Zoom Module

HD-SDI EX-SDI TVI 2.0 CVBS




Features


- 1/1.9" 2MP Sony CMOS sensor
- 1080p 60fps/30fps, 720p 60fps/30fps
- 12x Optical Zoom(7mm~84mm) & 32x Digital Zoom
- F1.5(wide) ~ F1.9(tele)
- Day & Night(ICR)
- Real-time True WDR
- Digital Noise Reduction(2D+3D)
- Digital Image Stabilization
- Privacy Mask Function
- High Light Compensation
- Intelligent Motion Detection
- Defog Function
- Supports VISCA, Pelco-D/P Protocol
- Video Out : HD-SDI, EX-SDI, TVI 2.0, CVBS

Dimensions


Unit : mm




FRONT




LEFT SIDE




BACK

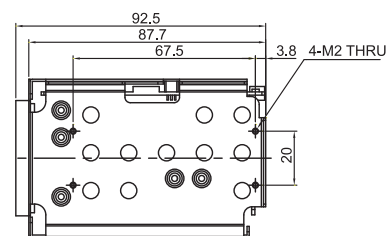

RIGHT SIDE




BOTTOM



TOP

Field of View

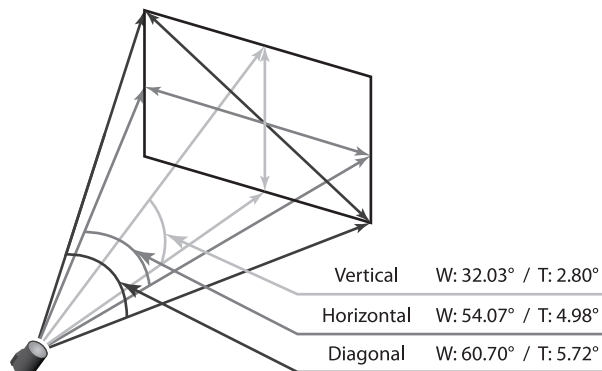


Specifications

MC-S128B				
Image Sensor	1/1.9" Sony CMOS Sensor			
Total Pixels	1,952(H) x 1,241(V) = 2.42M Pixels			
Active Pixels	1,937(H) x 1,097(V) = 2.12M Pixels			
Scanning System	Progressive Scan			
Sync. System	Internal			
Resolution	Digital : 1080p/60(50)fps, 1080p/30(25)fps, 720p/60(50)fps, 720p/30(25)fps			
	Analog : 700TVL			
Min. Illumination	Color(1/30s) : 0.15 lux , BW(1/30s) : 0.01lux			
	Color DSS(1/7.5s) : 0.0375 lux , BW DSS(1/7.5s) : 0.002 lux			
Video Output	HD : HD-SDI, EX-SDI, TVI 2.0			
	Analog SD : VBS(except WDR mode)			
S/N Ratio	more than 50dB(AGC off)			
Lens Type	12x Day & Night Zoom Lens			
Zoom Ratio	Optical 12x, Digital 32x Zoom			
Focal Length	f = 7.0mm ~ 84mm			
Aperture Ratio	F1.5 (wide) ~ F1.9 (tele)			
Angle Of View(D, H, V)	Wide	60.70°	54.07°	32.03°
	Tele	5.72°	4.98°	2.80°
AF Mode	Auto / One Push / Manual			
Min. Distance	0.1 / 1.0 / 3.0 / 5.0 / 10.0 m			
Lens Refresh	One Push / 1 ~ 10Day			
Digital Zoom	Off / MAX 2x ~ 32x			
Exposure	Auto / Iris.P / Shut.P / Manual			
Gain Control(AGC)	Off / On			
Shutter Speed	1/30(25) ~ 1/30,000 sec			
Iris	0 ~ 20 steps			
Digital Slow Shutter(DSS)	Off / 2x / 4x / (8x : 60 or 50 fps mode only)			
Brightness	0 ~ 20 steps			
WDR/BLC	Off / WDR / BLC			
Day&Night	Auto / Day / Night / Ext-in			
White Balance	Auto / One Push / Manual / Indoor / Outdoor			
HLC	Off / On / Night Only			
DNR	Auto / Off / Low / Middle / High			
Mirror	Off / H / V / H&V			
Sharpness	0 ~ 10 steps			
ACE	Off / Low / Middle / High			
Defog	Off / On(Auto / Manual)			
Privacy Mask	Max. 24 Areas			
Motion Detection	Max. 3 Areas			
Defect Detection	One push			
System	NTSC / PAL			
Communication	Baud Rate : 2400 / 4800 / 9600 / 19200 / 38400 / 57600 / 115200			
	Protocol : VISCA / Pelco-D / Pelco-P / Update			
Language	English / Simplified Chinese / Traditional Chinese / Japanese			
Power Source	9V to 15V DC			
Power Consumption	250mA			
Power Input	Connector			
Video Output	Connector			
Storage Temperature	-20℃ ~ +60℃ (Humidity : 0%RH ~ 90%RH)			
Operating Temperature	-10℃ ~ +50℃ (Humidity : 0%RH ~ 90%RH)			
Dimensions	50(W) x 58.5(H) x 92.5(D)			
Weight	254g			

* Design and specifications are subject to change without notice.

Pin Assignment

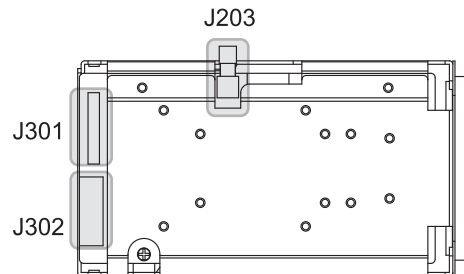

J301	
1	TVI-OUT
2	GND
3	VBS-OUT
4	GND
5	NC
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	DC+5V OUT
17	GND
18	GND
19	DC+12V IN
20	DC+12V IN
21	DC+12V IN
22	GND
23	GPIO2
24	GPIO1
25	ADKEY(OSD Control)
26	D/N-IN
27	IR-ON
28	MD-OUT
29	RS-485(-)
30	RS-485(+)

J302	
1	RxD
2	TxD
3	GND
4	DC+12V IN
5	GND
6	VBS-OUT
7	GND
8	TVI-OUT
9	GND

Ref 10019HR-09(YEONHO)

J203	
-	HD-SDI

Ref MMCX-R/A

Ref USL00-30L-C(KEL Cop.)