

VKC-1370

Home | Security | Cameras | Boxed

VKC-1370
1/3" Day&Night Camera, 540TVL, 230VAC,

Art-Nr. 92537



Lens not included

Main Features

1/3" Sony Super HAD CCD	Switchable flickerless adjustment
Sensitivity of 0.04Lux at F1.2 (b&w)	Automatic white balance (ATW)
Automatic gain control (AGC)	Enhanced sharpness compensation
Removable IR cut filter	Auto iris and DC iris control
Switchable backlight compensation (BLC)	Supply voltage: 230VAC/50Hz
Iris/Shutter control selectable (ALC/ESC)	CS mount

Specifications

System	day&night
Video standard	PAL
Sensor size	1/3"
Imager	CCD, Sony Super HAD II Interline Transfer
Active picture elements	440,000 (H) 752 x (V) 582 pixels
Horizontal resolution	540 TVL
Synchronization	internal
Signal-to-noise ratio	50dB (AGC OFF)
Sensitivity (at 50% video signal)	0,15 Lux, (colour), 0.04Lux (B&W) at F1.2 measured)
Automatic electronic shutter (ESC)	1/50 ~ 1/100,000sec.
Low speed shutter	no
Digital Noise Reduction (DNR)	no
Backlight compensation	BLC, ON/OFF switchable

VKC-1370

(Continuation Specifications)

Wide Dynamic Range (WDR)	no
White balance	automatic/manually (2000K - 8000K)
Aperture Correction (APC)	horizontal and vertical
Flickerless function	yes
IR cut filter	switchable
Day/Night switching	automatic and manual
Activity detection	no
Digital zoom	no
e-PTZ support	no
Lens mount	CS mount
Iris control	Manual iris, DC/AI controlled iris
Illumination	no
External adjustments	4 DIP switches for: ALC/ESC, BLC On/Off, Flickerless On/Off, Day/Night, Lens select (AI/DC iris control). Level for DC voltage controlled iris, Flange focus
Video outputs	composite (CVBS), 1Vp-p, (C)VBS, 75ohms, BNC
External connections	Video (BNC), Auto Iris/DC Iris, Power input (2 pin)
Serial interfaces	no
Camera mount	1/4" - 20 UNC thread on top and bottom
Alarm inputs	-
Alarm outputs	-
Supply voltage	230VAC
Housing	indoor
Colour	Pantone Cool Gray 2C
Hidden cable management	no
Vandalism resistant	no
Protection rating	n/a
Temperature range (operation)	-10°C ~+50°C
Dimensions (HxWxD)	55x65x106mm
Weight	410g
Parts supplied	power cord
Certificates	CE


Optional accessories

70771	WD-23	Wall Mount Bracket with Ball Joint, 1/4" Camera Fixing Screw, Pantone 877
43274	F03Z2.6DC-NFSHR	F1.0/3-8mm DC Lens, Varifocal, No Focus Shift, High Resolution, 1/3" CS Mount
79644	VTL-WWD	Weatherproof Housing (300mm) RAL9002, Wallbracket, Thermostat, Heater 12-24V

VKC-1370

Home | Security | Cameras | Boxed

Technical drawing

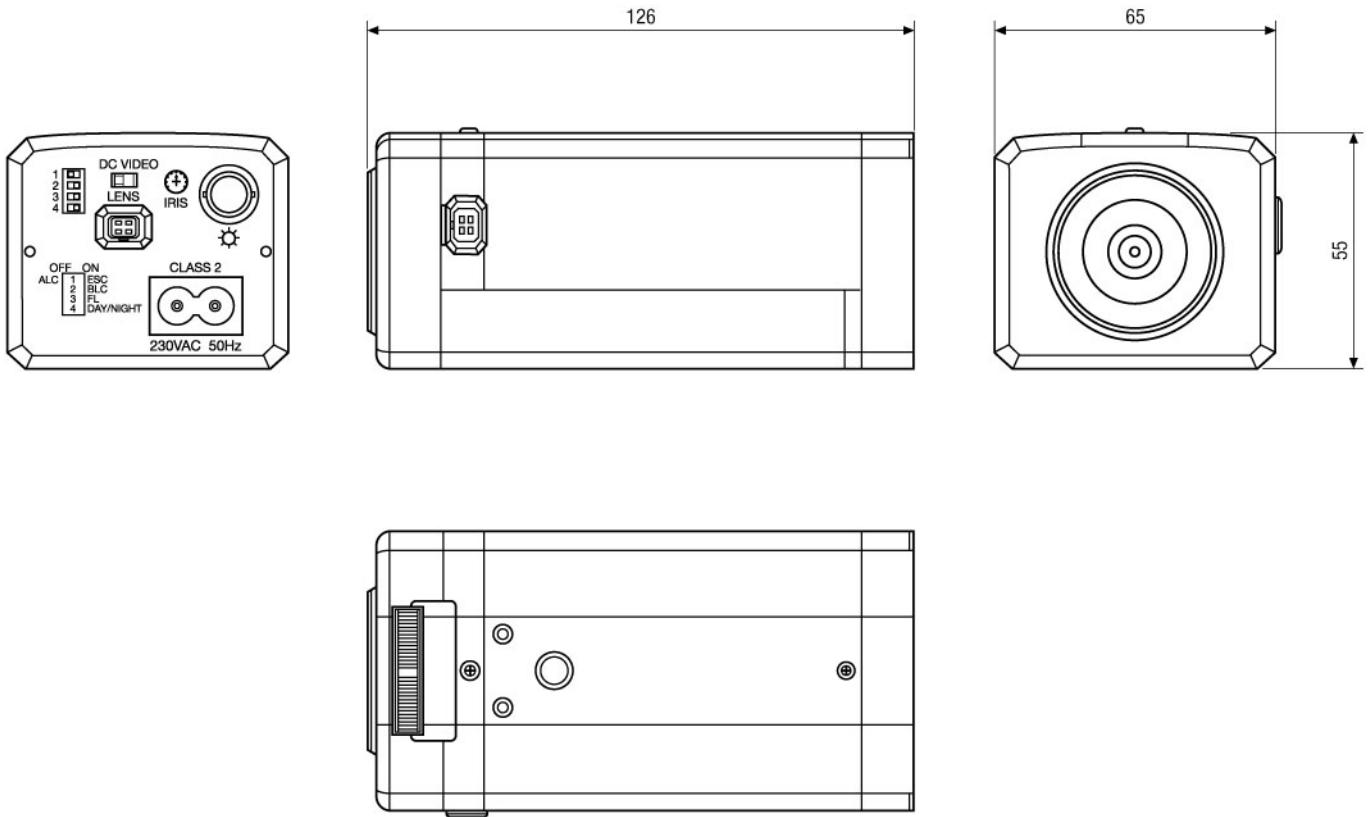

Maße/Dimensions: mm

GENITECH

108, rue Henri Barbusse - 95100 Argenteuil - FR
Phone - 01.49.63.74.41 - Telefax - 01.49.63.74.51
ecorbeau@genitech.fr - www.genitech.fr